


PRODUCT CATALOGUE







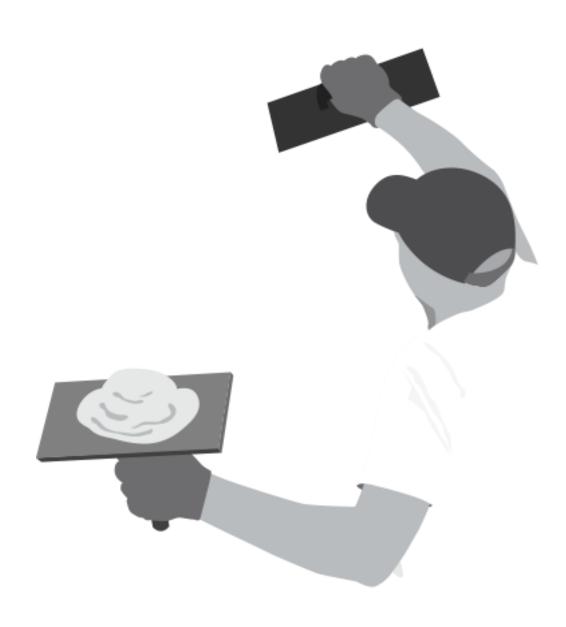





ABOUT EUROMIX™

For over 30 years, Euromix[™] has been synonymous with render. This reputation is based on our commitment to innovation, maintaining the highest quality standards and investing in cutting-edge research and development. Euromix[™] Render Systems allow you the flexibility to realise your most demanding designs, whether flat or curved, concave, or convex, white, or vibrantly coloured.

By specifying Euromix Renders, you avoid the problems associated with conventional cementitious renders, such as cracking and colour fading. Specify Euromix $^{\text{TM}}$ and you can be sure of a beautiful solution that will stay looking good for years – an attractive prospect for developers and end users alike.



RENDERS	1
EURALBI WHITE SET	2
JOINTING & PATCHING	2
PRIMERS	3
PAINTS.	3
TEXTLIRES	4





EUROMIX™ RE	NDERS	Size	Pack	Coverage (m²)
RENDER POR NET OF THE PORT OF	Euromix [™] Render (AS1530.1 Compliant) Euromix [™] Render is a versatile cement-based render suitable for application by hand over most substrates, in residential construction, as a low/medium build base coat. Render can also be float or sponge finished as a topcoat. *now in weatherproof packaging!	20 kg	56/pallet	Depending on thickness 4mm; approx. 3.5m² per bag
CREAM RENDER SOLES	Euromix™ Cream Render (AS1530.1 Compliant) Euromix™ Cream is a cement-based render that is best suited as a medium/high build base render over a wide range of substrates in both residential and commercial buildings. Usually applied by hand, Cream Render can also be sprayed over masonry substrates. *now in weatherproof packaging!	20 kg	56/pallet	Depending on thickness - 4mm; approx. 3.5m² per bag Application: by hand or projection machine (on brick/block)
SKIMCOAT DE	Euromix [™] Skim Coat (AS1530.1 Compliant) Euromix [™] Skim Render is designed to be used as a finishing coat over base render or other finished surfaces. Euromix [®] Skim can be applied in thicknesses from 2 to 3mm and be floated to a smooth flat finish or sponged to give an even textured finish. *Now in weatherproof packaging!	20 kg	56/pallet	By hand only: 2-3mm Application: Sponged, smooth or float Coverage; At 2-3mm, will cover 6-8m² per bag
FP RENDER FULL POLYMER	Euromix [™] FP Render (AS1530.1 Compliant) Euromix [™] FP Render is quick curing dry mix, full polymer, and cement render – no added bond required in mixing. Particularly suitable for application over sheet and panel substrates, like AAC, polystyrene (EPS), fibre cement (FC) and plaster-based materials. Euromix [™] FP Render is also suitable for application over masonry substrates. *now in weatherproof packaging!	20 kg	56/pallet	Coverage: At 4-5mm approx. 3.5m ² Application; by hand or projection machine
LWHB RENDER LIGHT WOLGET IT SECRET	Euromix™ LWHB (High Build) Render Euromix™ LWHB Render a full polymer render that can be applied by hand or machine, as a high build base coat over most substrates in a residential or commercial building. Particularly suited to rectification of misaligned and/damaged substrates. High adhesion allows high build thicknesses due to special low weight fillers and chemicals. Boasts up to 30mm in one application! *	15 kg	56/pallet	Coverage: At 10mm, 1m ² Application; by hand or projection machine
PENDER IS INCLUDED IN	Euromix™ NPS Keycoat Render Euromix™ NPS Keycoat Render is a full polymer render that can be applied by hand or machine, as a medium build base coat over nonporous substrates, like PVC, EPS, and Fibre Cement. Suitable as a keycoat on difficult substrates where other renders cannot be used.	20 kg	56/pallet	Coverage: At 4mm, 3-5m ²



EUROMIX™ BON	ND	Size	Pack	Mixing Ratio
CUROMX BOND BOND	Euromix™ Bond Euromix™ Bond is a liquid additive formulated to increase the adhesion, compressive and chemical strength of Euromix Renders. Bond is added to water in various ratios dependent on the type and condition of the substrate (to form a 'gauge').	5 Lt 20 Lt 120 Lt	32/pallet 4/pallet	Substrate Ratio Clay Bricks 1:19 Cement Bricks 1:15 Concrete 1:9 Calcil 1:15 AAC 1:9 EPS 1:4 FC 1:4
EUROMIX™ JO	INTING & PATCHING	Size	Pack	Coverage (m²)
PATCH COARSE Why the	Euromix™ Patch Coarse A pre-mixed, water based, jointing and patching compound manufactured with premium quality fillers and polymers. Patch Coarse is ideal as a patching compound and as a pre-mixed polymer render where lower builds are required.	5 L 15 L	50/pallet 32/pallet	When applied as a topping (1mm) 13 to 15 m ² As a joining compound 75 lineal meters.
PATCH FINE	Euromix™ Patch Fine A water based, fine build, topping and patching compound manufactured with premium quality fillers and polymers. Euromix™ Patch Fine is ideal for rectification work, facing-up and general preparation of substrates that require a smoother, fine topcoat finish (particularly where paint is to be applied).	5 L 15 L	50/pallet 32/pallet	As a topping, 25-30 m ²
EURALBI® WH	IITE-SET PLASTERS	Size	Pack	Coverage (m²)
OURANDA PAR	Euralbi® Plus Euralbi® Plus has been designed for use as a 'stand-alone' white set or as the base coat in a two-component system where Euralbi® Fino topcoat is used to provide a finer set finish. Made in Spain.	24 KG	48/pallet	At 10mm thick, 2 m ² At 1mm thick, approx.20 m ²
Onway By Lino	Euralbi® Fino			
	Euralbi® Fino has been designed for use as a fine finish, white set topcoat. Fino works best as the finishing coat applied over a Euralbi Plus base coat. Made in Spain	23 KG	48/pallet	At 1mm thick, 30-40 m² from one coat



EUROMIX™ F	PRIMERS	Size	Pack	Coverage (m²)
NPS PATCH STATE OF THE STATE O	Euromix™ NPS Primer Euromix™ NPS Primer is a solvent free primer, designed specifically for use on non-porous surfaces, like, PVC, metal, glazed bricks, high density concrete and most fired tiles. NPS Primer provides an excellent base for the application of Euromix renders, textures, and paints over nonabsorbent surfaces.	15 L	32/pallet	General coverage, 1 litre per 10 m ² on general smooth surfaces.
ACRYLIC PRIMER	Euromix™ Acrylic Primer A water based penetrative primer. Off-white at the time of manufacture, Euromix™ Acrylic Primer can be tinted to achieve a desired colour — usually to match the colour of subsequent coatings. Euromix Acrylic Primer is generally applied by brushed, rolled, or sprayed, as a surface primer over internal or external wall surfaces, to enhance the adherence of acrylic and other water-based coatings.	15 L	16/pallet	15L, undiluted, will cover approx. 90 m².
EUROMIX™ T	EXTURES	Size	Pack	Coverage (m²)
FINE COAT	Euromix [™] Fine Coat Texture Euromix [™] Fine Coat Texture Coating is manufactured with the finest small round grain sand (0.5mm approx), designed for decorative finishing over Euromix [™] Renders and other substrates. This premium quality, flexible and durable coating offers a small sparkle effect, excellent water resistance and provides a 'new weathered stone' appearance.	15 L	32/pallet	up to 17 SQM per 15 L bucket.
SANDSTONE SANDSTONE THE PROPERTY OF THE PROPER	Euromix™ Sandstone Texture Euromix™ Sandstone Texture Coating contains a medium, round sand (0.9mm approx.). Designed to provide an attractive sparkle effect appearance, that offers a durable, flexible and water repellent decorative finishing coating with excellent coverage over Euromix™ Renders and other substrates.	15 L	32/pallet	up to 15 SQM per 15L bucket
SAND FINISH TEL TOTAL MARKET	Euromix™ Sand Finish Texture Euromix™ Sand Finish Texture Coating uses a large round sand grain (typically 1.2mm) that retains the same flexibility, durability, and water resistance properties as Fine Coat and Sandstone. Providing a more traditional texture look finish, it is suited to both commercial and residential applications.	15 L	32/pallet	up to 14 SQM per 15L bucket